



TT5-2X2R

3-, 4- & 5-Lamp T5HO
Twin Tube Recessed Mount



FEATURES & BENEFITS

- **Push Button Access** - Industry Leading Maintenance Advantage giving access to all internal components in seconds without the use of tools and removal of lamps!
- **Over 50% Energy Savings Compared to HID** and old fluorescent systems
- **Longer Lamp Life For T5HO!** 25,000hrs @ 3hrs/start and 35,000hrs @ 12hrs/start
- **95% Lumen Maintenance For T5HO** compared to Metal Halide that depreciates 40-60%
- **Vented Housing** construction for optimal ballast performance and long life
- **Instant On...Instant Restrike...No Flicker!** Color consistent across all fixtures
- **Auto On/Off Occupancy Sensors Factory Installed** and paired with Programmed Start ballasts
- **Superior Visual Comfort Over HID** with higher CRI from AEI's fluorescent fixtures including a wide range of color temperatures




EASY ACCESS
No Parts To Drop

REDUCED LABOR
Opens In Seconds


SAVES MONEY
Exclusive Features

Wireway access in seconds without removing lamps or use of any tools!

DIMENSIONS

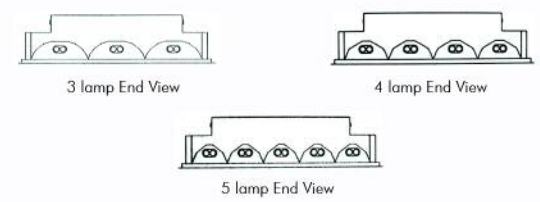

	Length	Width	Height
TT5-2X2R-3, 4 & 5 LAMP	24"	24"	5.75"

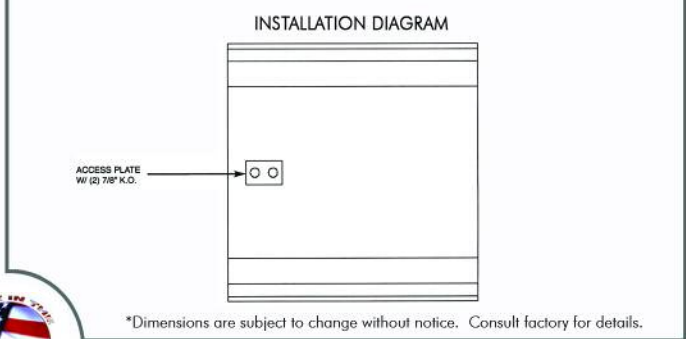

SPECIFICATIONS

HOUSING: - Code Gauge steel body with post powdercoating standard. Properly vented housing keeps ballast cool. Aluminum housing optional. Cold storage housing without venting available on request.

REFLECTIVE: Specular Miro4® reflectors standard. White reflectors are optional. Consult AEI for other reflector options.

ELECTRICAL: Wired per specified voltage using electronic ballast rated for 75 degree Celsius (C). 90 degree Celsius ballast rating available for high ambient applications. The TT5-2X2R fixtures are U.L. Listed for damp locations. TT5 lamps are rated at 15,000 & 20,000 hours.

MOUNTING: The HiMax TT5-2X2R fixtures are designed for recessed ceiling applications.

ORDERING GUIDE



BRINGING YOU OUT OF THE DARK AGES!

Fixture Model	Housing	# Of Lamps Wattage	Lens	Voltage	Lamp Color	Options	Mounting
TT5-2X2R							

CONSULT
AEILighting.com
for
Photometric
Information
On This
Fixture

<p># OF LAMPS 3=3 Lamps 4=4 Lamps 5=5 Lamps</p> <p>WATTAGE 40=40 Watts 50=50 Watts 55=55 Watts</p>	<p>CL=Clear Acrylic PR=Prismatic PC=Polycarbonate VR=Vandal Resistant Leave Blank If No Lens</p>	<p>VOLTAGE 12=120V 27=277V 34=340V 48=480V UNI=Universal UNI90=90C Universal</p>	<p>30=3000K 35=3500K 41=4100K 50=5000K Leave Blank If No Lamps</p>	<p>SENSORS OC1=Aside Sensor OC3=360 Degree Sensor OCL1=360 Degree Low Temp. Sensor Consult Factory For More Options</p> <p>CORDS / PLUGS X'C=Length + Cord Only X'CP=Length/Cord + Style/Plug Consult Factory For More Options</p> <p>BALLASTS EMXXXX=Emergency Ballast/Lumens DIM=Dimming Ballast</p> <p>HOUSING/REFLECTORS WH=White Reflector CT=Cold Temp. (no venting)</p> <p>OTHER CST=Custom Consult Factory For Custom Applications & Custom Ordering Number</p>	<p>VH=V-Hook HK=3/4" Hook GPLX=Gripple + Style (L,S,T,Y) Consult Options Guidelines For Gripple Details</p> <p>HUB=3/4" Hub X'ST=Length + Galvanized Stem SB=3/4" Slide Box Assembly Hub and Stem Optional SP=3/4" Single Point Bracket Hub and Stem Optional</p>
--	---	---	---	---	--

AEI LIGHTING INC.
1113 West Birchwood Avenue
Mesa, AZ 85210
TEL 480.733.6594
FAX 480.733.6596
WEB www.aeilighting.com

Project Name _____ Fixture Type _____

Catalog # _____ Quantity _____

ADVANCED ENERGY IDEAS, INC. TT5-2X2R