



FEATURES & BENEFITS

- **Push Button Access** - Industry Leading Maintenance Advantage giving access to all internal components in seconds without the use of tools and removal of lamps!
- **Over 50% Energy Savings Compared to HID** and old fluorescent systems
- **Longer Lamp Life For T5HO!** 25,000hrs @ 3hrs/start and 35,000hrs @ 12hrs/start
- **95% Lumen Maintenance For T5HO** compared to Metal Halide that depreciates 40-60%
- **Vented Housing** construction for optimal ballast performance and long life
- **Instant On...Instant Restrike...No Flicker!** Color consistent across all fixtures
- **Auto On/Off Occupancy Sensors Factory Installed** and paired with Programmed Start ballasts
- **Superior Visual Comfort Over HID** with higher CRI from AEI's fluorescent fixtures including a wide range of color temperatures

SPECIFICATIONS

HOUSING: - Code Gauge steel body with post powdercoating standard. Properly vented housing keeps ballast cool. Aluminum housing optional. Cold storage housing without venting available on request.

REFLECTIVE: Specular Miro4® reflectors standard. White reflectors are optional. Consult AEI for other reflector options.

ELECTRICAL: Wired per specified voltage using electronic ballast rated for 75 degree Celsius (C). 90 degree Celsius ballast rating available for high ambient applications. The TT5-2X2R fixtures are U.L. Listed for damp locations. TT5 lamps are rated at 15,000 & 20,000 hours.

MOUNTING: The HiMax TT5-2X2R fixtures are designed for recessed ceiling applications.


Featuring "Push Button Access"



- EASY ACCESS**
No Parts To Drop
- REDUCED LABOR**
Opens In Seconds
- SAVES MONEY**
Exclusive Features


Wireway access in seconds without removing lamps or use of any tools!

DIMENSIONS

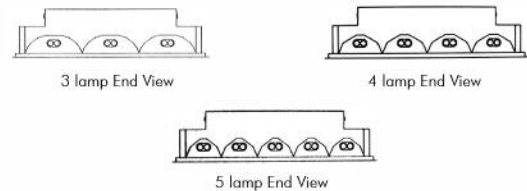

	Length	Width	Height
TT5-2X2R-3, 4 & 5 LAMP	24"	24"	5.75"

INSTALLATION DIAGRAM

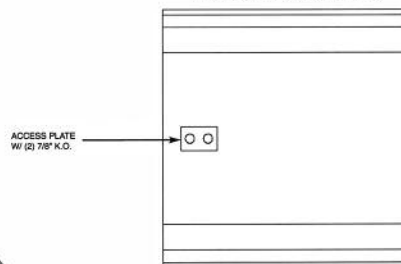

*Dimensions are subject to change without notice. Consult factory for details.

ORDERING GUIDE



BRINGING YOU OUT OF THE DARK AGES!

Fixture Model	Housing	# Of Lamps Wattage	Lens	Voltage	Lamp Color	Options	Mounting
TT5-2X2R							
CONSULT AEILighting.com for Photometric Information On This Fixture		# OF LAMPS 3=3 Lamps 4=4 Lamps 5=5 Lamps WATTAGE 40=40 Watts 50=50 Watts 55=55 Watts	CL=Clear Acrylic PR=Prismatic PC=Polycarbonate VR=Vandal Resistant Leave Blank If No Lens	VOLTAGE 12=120V 27=277V 34=340V 48=480V UNI=Universal UNI90=90C Universal	30=3000K 35=3500K 41=4100K 50=5000K Leave Blank If No Lamps	SENSORS OCI=Axis Sensor OC3=360 Degree Sensor OCL=360 Degree Low Temp. Sensor Consult Factory For More Options CORDS / PLUGS X'C=Length + Cord Only X'CKP=Length/Cord + Style/Plug Consult Factory For More Options BALLASTS EMXXXX=Emergency Ballast/Lumens DIM=Dimming Ballast HOUSING/REFLECTORS WH=White Reflector CT=Cold Temp. (no venting)	CST=Custom Consult Factory For Custom Applications & Custom Ordering Number VH=V-Hook HK=3/4" Hook GPLX=Gripple + Style (L,S,T,Y) Consult Options Guidelines For Gripple Details HUB=3/4" Hub X'ST=Length + Galvanized Stem SB=3/4" Slide Box Assembly Hub and Stem Optional SP=3/4" Single Point Bracket Hub and Stem Optional

Project Name _____ Fixture Type _____
 Catalog # _____ Quantity _____