

# TT5A 6-LAMP 8-LAMP

6- & 8-Lamp T5HO  
Twin Tube Adjustable For  
High Bay/Aisle Applications



**HiMax** Energy Saving High-Performance  
Fluorescent Lighting Systems

## FEATURES & BENEFITS

- **Push Button Access** - Industry Leading Maintenance Advantage giving access to all internal components in seconds without the use of tools and removal of lamps!
- **Over 50% Energy Savings Compared to HID** and old fluorescent systems
- **Longer Lamp Life For T5HO!** 25,000hrs @ 3hrs/start and 35,000hrs @ 12hrs/start
- **95% Lumen Maintenance For T5HO** compared to Metal Halide that depreciates 40-60%
- **Vented Housing** construction for optimal ballast performance and long life
- **Instant On...Instant Restrike...No Flicker!** Color consistent across all fixtures
- **Auto On/Off Occupancy Sensors Factory Installed** and paired with Programmed Start ballasts
- **Superior Visual Comfort Over HID** with higher CRI from AEI's fluorescent fixtures including a wide range of color temperatures

## Featuring "Push Button Access"


**EASY ACCESS**  
No Parts To Drop

**REDUCED LABOR**  
Opens In Seconds

**SAVES MONEY**  
Exclusive Features

Wireway access in seconds without removing lamps or use of any tools!

## DIMENSIONS

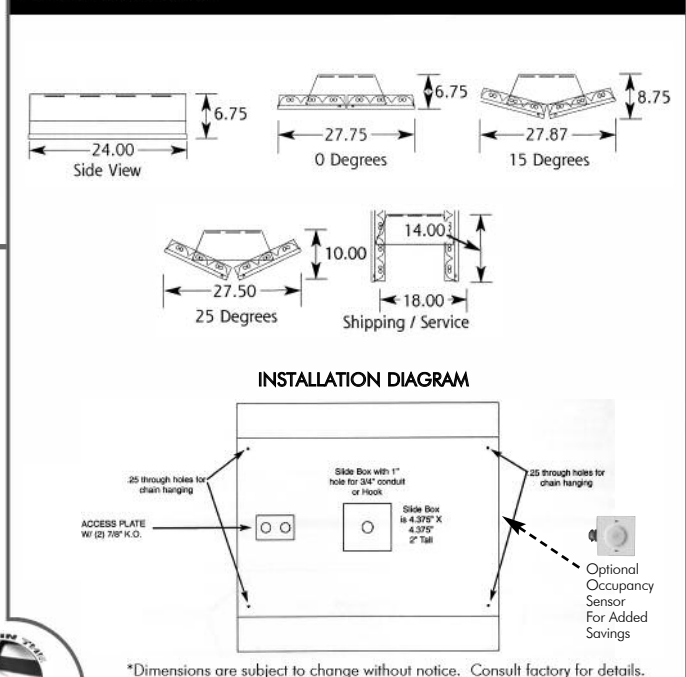

## SPECIFICATIONS

**HOUSING:** Code Gauge steel body with post powdercoating standard. Properly vented housing keeps ballast cool. Cold storage housing without venting available on request.

**REFLECTOR DESIGN:** Specular Miro4® reflectors standard. White reflectors are optional. Consult AEI for other reflector options.

**ELECTRICAL:** Wired per specified voltage using electronic ballast rated for 75 degree Celsius (C). 90 degree Celsius ballast rating available for high ambient applications. The TT5A fixtures are U.L. Listed for damp locations. TT5 lamps are rated at 15,000 & 20,000 hours.

**MOUNTING:** The HiMax TT5A fixtures are designed to be chain or pendant mounted.

## ORDERING GUIDE



**BRINGING YOU OUT OF THE DARK AGES!**

Fixture Model  
**TT5A**

# Of Lamps Wattage      Lens      Voltage      Lamp Color      Options      Mounting

**CONSULT**  
AEILighting.com  
for  
Photometric  
Information  
On This  
Fixture

**# OF LAMPS**  
6=6 Lamps    8=8 Lamps

**WATTAGE**  
40=40 Watts    50=50 Watts  
55=55 Watts

**LENS**  
CL=Clear Acrylic    PR=Prismatic  
PC=Polycarbonate    VR=Vandal Resistant  
**Leave Blank If No Lens**

**VOLTAGE**  
12=120V    27=277V  
34=340V    48=480V  
UNI=Universal  
UNI90=90C Universal

**LAMP COLOR**  
30=3000K    35=3500K  
41=4100K    50=5000K  
**Leave Blank If No Lamps**

**SENSORS**  
OCI=Aisle Sensor    OC3=360 Degree Sensor  
OCLT=360 Degree Low Temp. Sensor  
**Consult Factory For More Options**

**CORDS / PLUGS**  
XC=Length + Cord Only  
X'CBP=Length/Cord + Style/Plug  
**Consult Factory For More Options**

**BALLASTS**  
EMXXXX=Emergency Ballast/Lumens  
DIM=Dimming Ballast

**HOUSING/REFLECTORS**  
WH=White Reflector  
CT=Cold Temp (no venting)

**OTHER**  
CST=Custom  
**Consult Factory For Custom Applications & Custom Ordering Number**

**Mounting**  
VH=V-Hook    HK=3/4" Hook  
GPLX=Grippe + Style (L,S,T)  
**Consult Options Guidelines For Grippe Details**  
HUB=3/4" Hub  
X'ST=Length + Galvanized Stem  
SB=3/4" Slide Box Assembly  
**Hub and Stem Optional**  
SP=3/4" Single Point Bracket  
**Hub and Stem Optional**

**AEI LIGHTING INC.**  
1113 West Birchwood Avenue  
Mesa, AZ 85210  
TEL 480.733.6594  
FAX 480.733.6596  
WEB www.aeilighting.com

Project Name \_\_\_\_\_ Fixture Type \_\_\_\_\_

Catalog # \_\_\_\_\_ Quantity \_\_\_\_\_

ADVANCED ENERGY IDEAS, INC. TT5A 6-LAMP 8-LAMP